REQUEST FOR QUOTATION

RFQ NO	AKRSP/ /2023	Delivery Point	Nichagh Khot, Upper Chitral
RFQ Date	October 15, 2023	RFQ Submission Date	October 23, 2023

Description of Works: Supply and Transportation of Steel Channel Sections to Nichagh Khot, Upper Chitral

BOQ FOR CHANNEL MATERIALS

S.No	Description of Goods	Specifications	Unit	Quantity
1	GI sheet channel sections	width=3', depth= 2.5ft, gauge 14USG/1.98mm, length of each piece of channel 4ft, total length 350ft	Kg	4,412.
2	Steel Strips	3.33ft long, 2in wide, 4mm thick, Each section weights .75kg	Nos	88
3	Nut bolts	5/16in Dia,2in long	Kg	25
4	Transportation	To Nichagh Khot Project Site	Lumpsum	All Above mentioned Materials

Channel Section

NICHAGH 2 KHOT IRRIGATION CHANNEL REHABILITATION PROJECT

Steel Channel Section of Gauge 14 USG Standard (1.98mm)

Nut Bolt

Steel Strip For Bracing @ 4' Interval (4mm Thick,2" wide,4'4" Long)
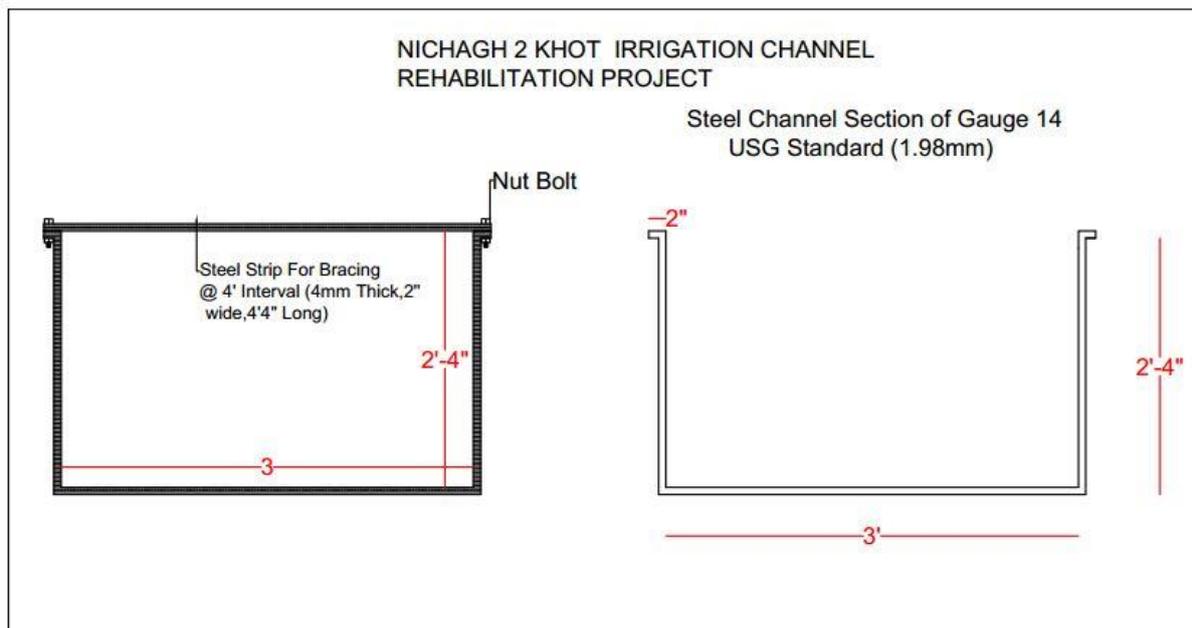
Technical Terms, Conditions and Quality Standards:

The particulars given below shall be binding on the Supplier and shall not be deviated without the approval of AKRSP's engineer.

Quotation Format: Suppliers must submit their quotations on the firm's letterhead, following the specified format.

Transportation Responsibility: Suppliers are responsible for safely transporting all materials to the project site.

Travel and Accommodation: Suppliers must make their own arrangements for travel and food during the supply of materials.

Design Compliance: All items supplied must adhere to approved and reliable design standards.

Inspection and Rejection: Inspection will occur at either Chitral or the project site. Any deviation from the specified specifications in the bidding documents can result in the rejection of materials, and the supplier is responsible for transporting defective materials.

Weight Compliance: Supplied items should meet specified weight limits. Deviations may result in deductions or no extra payment, depending on whether the weight is less or more than the specified value.

Evaluation Criteria: The evaluation of suppliers will be based on the quoted price only.

Escalation Charges: Escalation charges are not admissible as per AKRSP's procurement policy.

Payment Terms: Payment will be made in a single instalment, with 100% payment after inspection and delivery of all materials at the project site.

Taxes: Quoted prices should be inclusive of all taxes.

Mobilization Advance: If a mobilization advance is requested, the supplier must submit a bank guarantee or call deposit of an equal amount to AKRSP.

Rate Discrepancies: If AKRSP finds a significant difference between quoted rates and

prevailing market rates, the procurement process may be canceled, and suppliers involved in cartelization will be blacklisted. The same entity or individual cannot submit quotations under a different name.

Validity Period: Quoted rates should remain valid for at least one month.

Cancellation Rights: AKRSP reserves the right to cancel the procurement process at any stage without specifying explicit reasons.

Quantity Adjustments: AKRSP reserves the right to increase or decrease the quantity of materials as required, and suppliers must adjust accordingly without changing unit rates.

Delivery Timeline: Suppliers are required to deliver the required materials within 15 days after signing the agreement.

We have read the technical terms, conditions and quality standards mentioned above and agree with the requirements thereof except followings:

Exceptions (If Any, otherwise mark "No Observations"

Signature: _____   Name: _____

Designation: _____   Date: _____